




CONTROSOL®
Controlo Solar e Decoração, Lda.

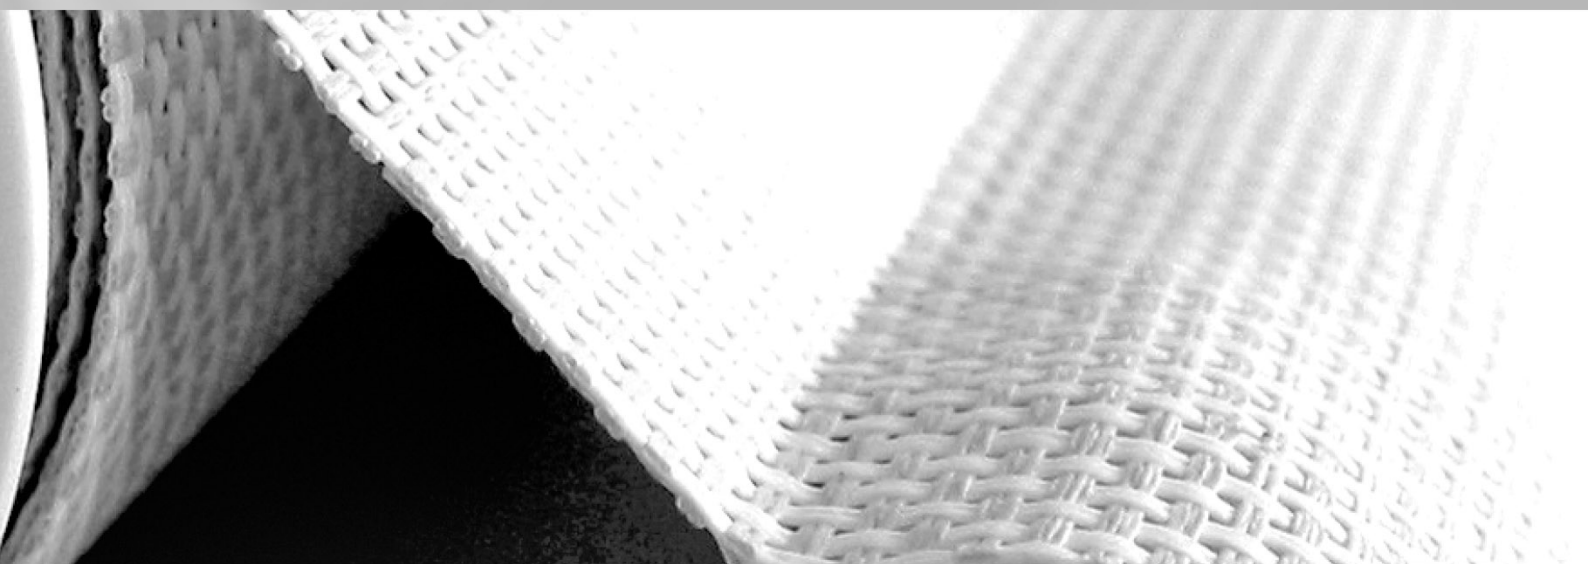

NATURA_Tela Texturada Rústica

		100% poliéster			100% poliéster
		220 g/m ²			190 g/m ²
	máx. 3,00 m			(XS) 1,83 m (XL) 2,44 m	
	grau 6			grau 6	
	4%				



estores de rolo



bandas verticais



painéis deslizantes



toldos

KIDS BO_Tela Black Out estampada

KB02

KB04

KB06

KB08

KIDS_Tela translúcida estampada

KT02

KT04

KT06

KT08

KIDS

KIDS BO

DARKGLASS_Tela Black Out de fibra de vidro revestida a PVC

DA00

DA01

DA09

DA12

DA14

DA19

DA20

DA25

DARKSILVER_Tela Dim Out em Trevira CS

DS06

DS07

DS20

DARKSILVER

DARKGLASS

CAIRO_Tela Black Out de poliéster

CR00

CR01

CR04

CR06

CR07

CR46

CR42

CR44

CR13

CR14

CR10

CR19

CR20

CR25

REFLECTIVE_Tela Dim Out com face metalizada

RT00

RT01

RT19

RT25

REFLECTIVE

CAIRO



100% poliéster

200 g/m²

máx. 2,50 m



grau 6

100% poliéster

340 g/m²

máx. 2,50 m

grau 6



100% Trevira CS

270 g/m²

máx. 2,20 m



grau 7

25% fibra de vidro
75% PVC (4 camadas)470 g/m²(XS) máx. 1,83 m
(XL) máx. 2,44 m

grau 8



100% poliéster

200 g/m²

máx. 2,50 m



grau 6

100% poliéster

340 g/m²

máx. 2,80 m

grau 6



composição

peso gr/m²

largura



solidez à luz



factor de abertura



ignifugo

TECNOSCREEN 3500_Tela microperfurada

S300

S301

S304

S312

S309

S311

S317

S318

S330

S319

S325

TECNOSCREEN 3500

TECNOSCREEN 5500_Tela microperfurada

S500

S501

S502

S503

S514

S518

S519

S525

TECNOSCREEN 5500

SILVERSCREEN_Tela microperfurada face exterior metalizada

SL00

SL01

SL03

SL19

SL25

TECNOSCREEN ZERO_Tela microperfurada

TZ00

TZ01

TZ19

TZ25

TECNOSCREEN ZERO

SILVERSCREEN

30% poliéster
70% PVC390 g/m²

máx. 3,00 m



grau 8



5%

30% fibra de vidro
70% PVC560 g/m²

máx. 3,00 m



grau 8



3%

30% poliéster
70% PVC500 g/m²

máx. 3,00 m



grau 8



0% a 1%

42% fibra de vidro
58% PVC400 g/m²

máx. 2,40 m

grau 8

4%



solidez à luz | grau 5 - suficiente | grau 6 - bom | grau 7 - muito bom | grau 8 - excelente



		100% acrílico	100% poliéster			100% poliéster			100% PVC pré-tensionado			100% acrílico
		190 g/m ²	200 g/m ²			190 g/m ²			420 g/m ²			300 g/m ²
		máx. 1,50 m	máx. 2,50 m			máx. 2,60 m			máx. 1,77 m			máx. 1,20 m
		grau 8	grau 6			grau 6			grau 8			grau 7
										ignífugo		

SISTEMA AVANGUARD

TELAS ESTAMPADAS



TELAS TÉCNICAS



SilverScreen®

- FACE EXTERIOR METALIZADA
- REJEIÇÃO DRÁSTICA DO CALOR INCIDENTE
- MICROPERFURADO
- CONTACTO VISUAL COM EXTERIOR



DARKSILVER®

- FACE EXTERIOR METALIZADA
- REJEIÇÃO DRÁSTICA DO CALOR INCIDENTE
- BLACK OUT COM CORES APELATIVAS



estores de rolo - bandas verticais - painéis deslizantes - toldos